

TFP-64-24M-D-2-HC

 Prep Table, 24x 1/6 Top Pans, 2 Drawers + 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	1629	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 5°C
External Depth (mm)	801	Number of Drawers	2	Refrigerant	R290
External Height (mm)	1181	Drawers location	Left (standard) or Right (option)	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 51 mm for cutting board overhang. Height with lid closed.	Exterior Construction	Stainless steel front, top & hood, aluminium sides and rear	Amps	1.9
Gross Volume (Litres)	623	Interior Construction	Clear coated aluminium, stainless steel base	Wattage	437
Supplied Shelves	2	Air Intake Position	Front	Defrost Type	Auto
Shelf Size (L x D mm)	750 x 508	Ventilation Position	Front		
Internal Net Height (mm)	500	Clearance Required	Zero back and sides		
Top Pans Supplied (depth mm)	24x 1/6 GN (100)	Cord Length (Meters)	2.13		
Per Drawer Capacity (max depth mm)	1 x 2/1 GN (150)	Standard w/ Locks	Not standard (SPEC3 option)		
Unpackaged Weight (kg)	241				
Packaged Weight (kg)	252				
Packaged Dimensions (W x D x H mm)	1723 x 864 x 1385				
Cutting Board (L x D mm)	1629 x 204				
Supplied with	Built-in recessed castors (19 mm clearance)				



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TFP-64-24M-D-2-HC

Prep Table, 24x 1/6 Top Pans, 2 Drawers + 1 Solid Swing Door

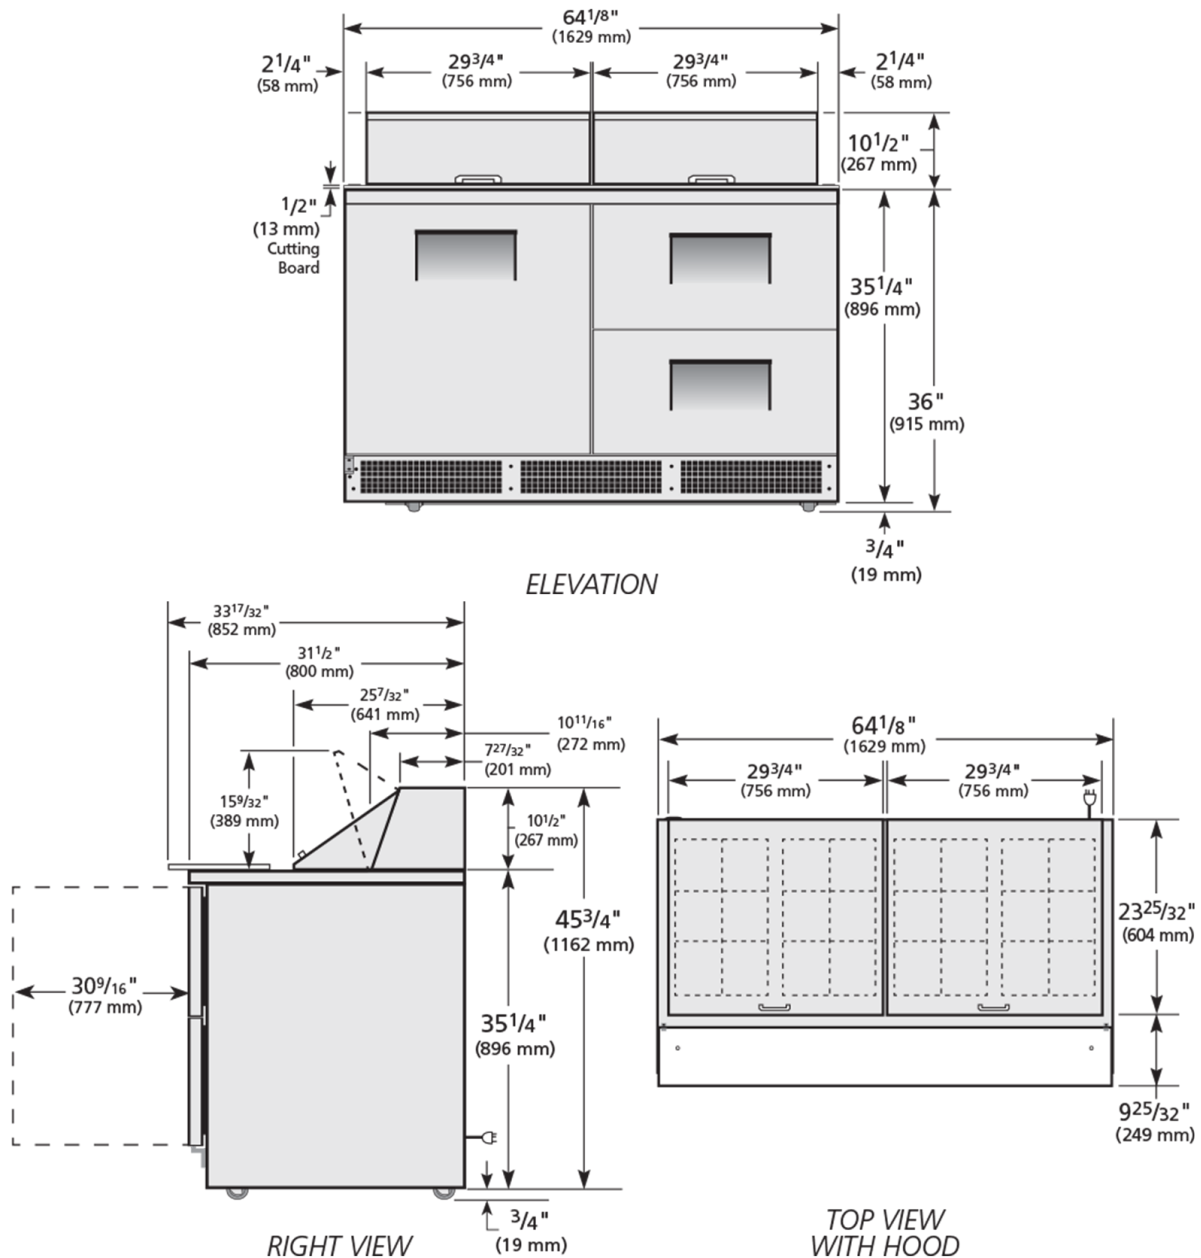

Specifications subject to change without notice.
 Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland **0800 783 2049**
 EMEA **+41 61 563 07 05**
 Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

