

Air Curtain Display

TOAM-48-HC~TSL01

 Upright Open Multideck Refrigerator, with Illuminated Sign panel



Dimensions		Build		Technical	
External Width (mm)	1220	Exterior Construction	Aluminium or Black powder coated Steel	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	757	Interior Construction	Clear or White coated aluminium, stainless steel base	Refrigerant	R290
External Height (mm)	1994	Air Intake Position	Front	Voltage / Frequency / Phase	220-240V/50Hz/1
Net Volume (Litres)	547	Ventilation Position	Rear	Amps	10
Gross Volume (Litres)	963	Clearance Required	102 mm rear, 305 mm above	Wattage	2300
Display Area (m²)	1.09	Cord Length (Meters)	3.04	Defrost Type	Auto
Supplied Shelves	4	Internal Lighting	LED		
Shelf Size (L x D mm)	1120 x 425				
Internal Net Height (mm)	1150				
Unpackaged Weight (kg)	234				
Packaged Weight (kg)	245				
Packaged Dimensions (W x D x H mm)	1321 x 889 x 2134				
Supplied with	Product supplied with Levelling Screws. Optional castors sold seperately.				



WARRANTY

5 YEARS

PARTS, COMPRESSOR AND LABOUR



natural
refrigerant.

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland

EMEA

Australia

0800 783 2049

+41 61 563 07 05

+61 2 9619 9999

TFIUK@truemfg.com


TrueCHCustomerService@truemfg.com

TrueRefAus@truemfg.com



TOAM-48-HC~TSL01

 Upright Open Multideck Refrigerator, with Illuminated Sign panel

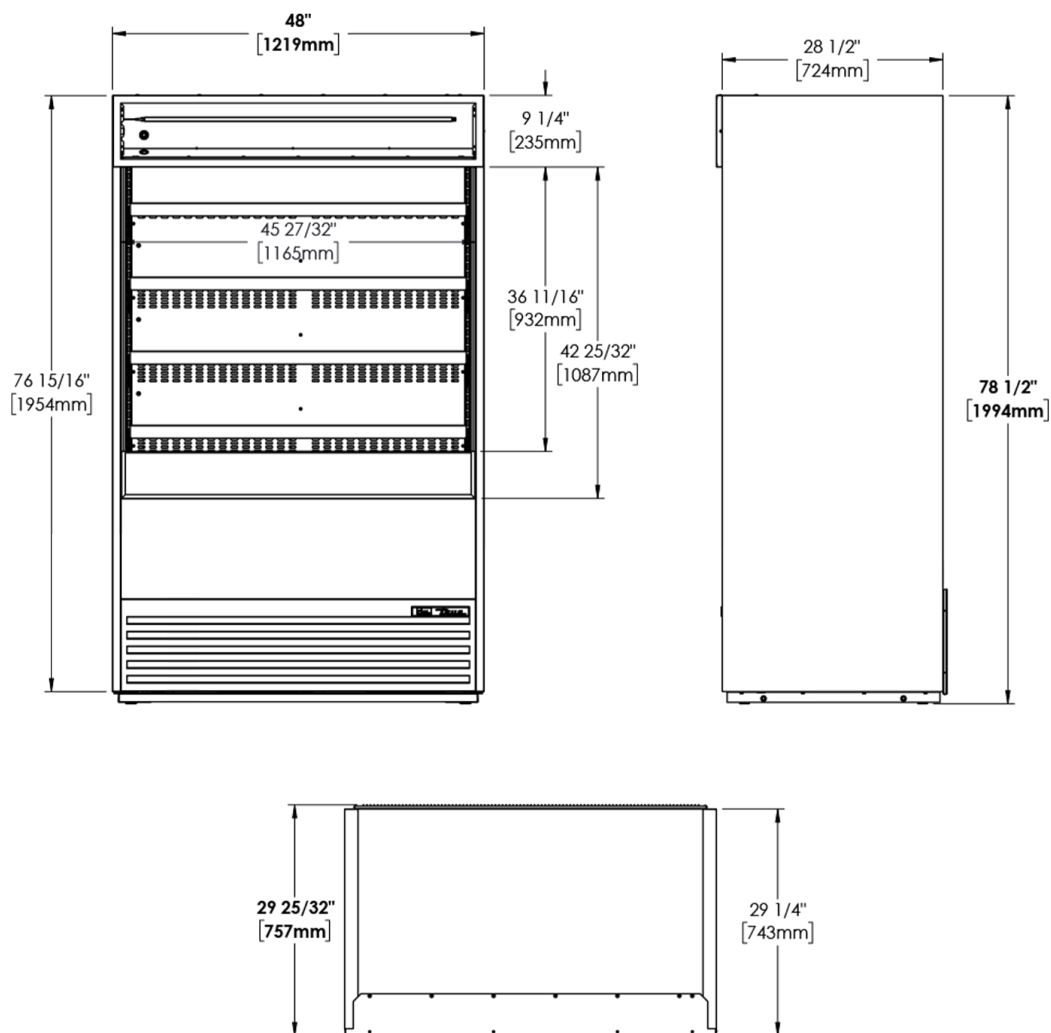

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
EMEA +41 61 563 07 05
Australia +61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

