

TUC-93D-4-HC

Deep Undercounter Refrigerator, 4 Drawers + 1 Solid Swing Door



Dimensions		Build		Technical	
External Width (mm)	2373	Door Description	1 Solid Swing Door	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	818	Number of Drawers	4	Refrigerant	R290
External Height (mm)	839	Drawers location	Left & Centre (standard) or Right (option)	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Amps	1.5
Net Volume (Litres)	458	Interior Construction	Clear coated aluminium, stainless steel base	Wattage	345
Gross Volume (Litres)	875	Air Intake Position	Front	Climate Class	5
Supplied Shelves	2	Ventilation Position	Front	EEC	B
Shelf Size (L x D mm)	Left & Right: 600 x 712. Central: 648 x 712	Clearance Required	Zero back and sides	EEI	32.8
Internal Net Height (mm)	550	Cord Length (Meters)	2.13	kWh/24hr	2.66
Per Drawer Capacity (max depth mm)	1x 2/1 GN (200)	Standard w/ Locks	Not standard (SPEC3 option)	kWh/Annum	970
Unpackaged Weight (kg)	278			Defrost Type	Auto
Packaged Weight (kg)	289				
Packaged Dimensions (W x D x H mm)	2540 x 966 x 1245				
Supplied with	ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm)				



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")



UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TUC-93D-4-HC

Deep Undercounter Refrigerator, 4 Drawers + 1 Solid Swing Door

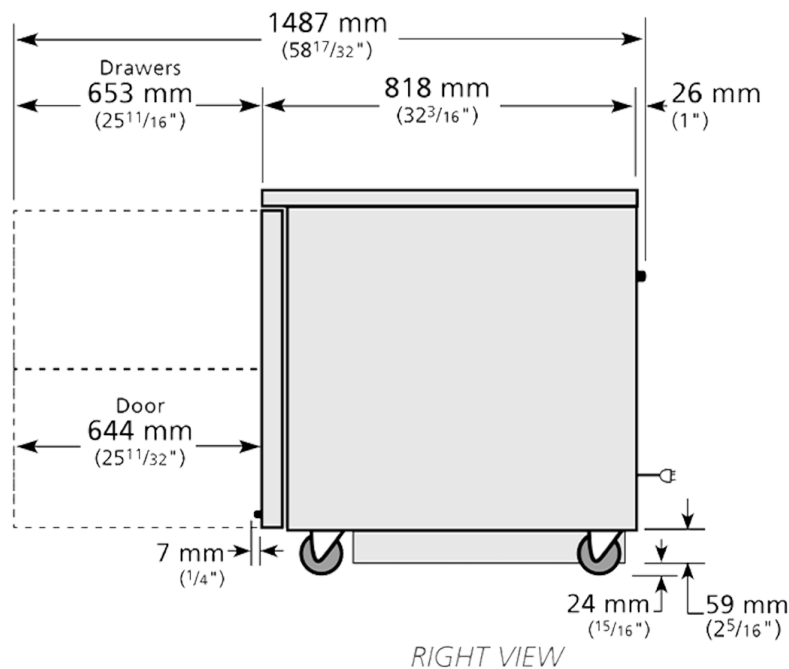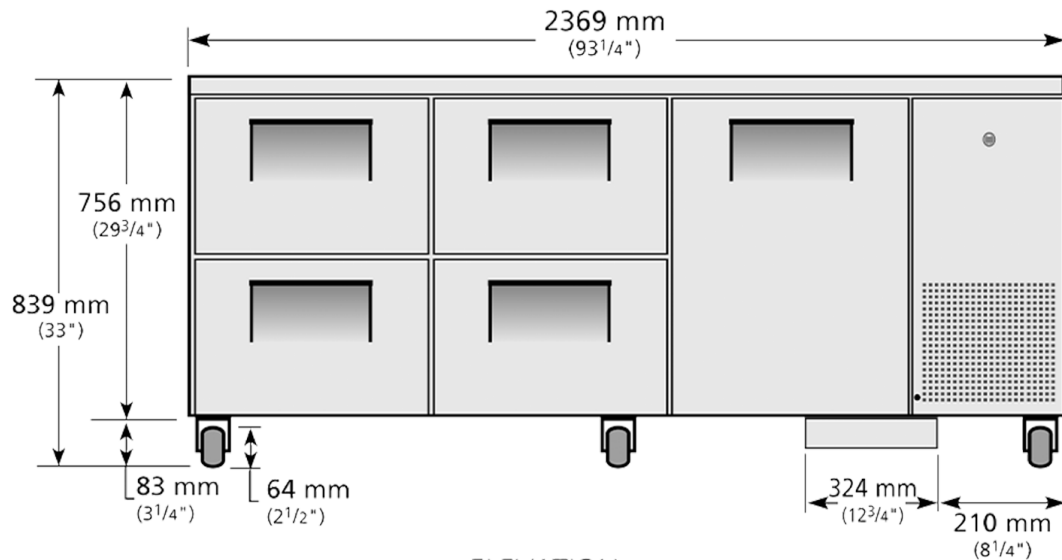

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

