

TWT-67D-4-HC

Deep Worktop Counter Refrigerator, 4 Drawers



Dimensions		Build		Technical	
External Width (mm)	1709	Number of Drawers	4	Temperature Holding	0.5 : 3.3°C
External Depth (mm)	823	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Refrigerant	R290
External Height (mm)	1004	Interior Construction	Clear coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50-60Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Air Intake Position	Front	Amps	1.3
Net Volume (Litres)	205	Ventilation Position	Front	Wattage	299
Gross Volume (Litres)	585	Clearance Required	Zero back and sides	Climate Class	5
Per Drawer Capacity (max depth mm)	1x 2/1 GN (200)	Cord Length (Meters)	2.13	Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Unpackaged Weight (kg)	175	Standard w/ Locks	Not standard (SPEC3 option)	Testing Standard	EN 16825
Packaged Weight (kg)	186			EEC	A
Packaged Dimensions (W x D x H mm)	1880 x 966 x 1245			EEL	24.8
Supplied with	ø 127 mm castors (158 mm height)			kWh/24hr	1.56
				kWh/Annum	573
				Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")


UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TWT-67D-4-HC

Deep Worktop Counter Refrigerator, 4 Drawers

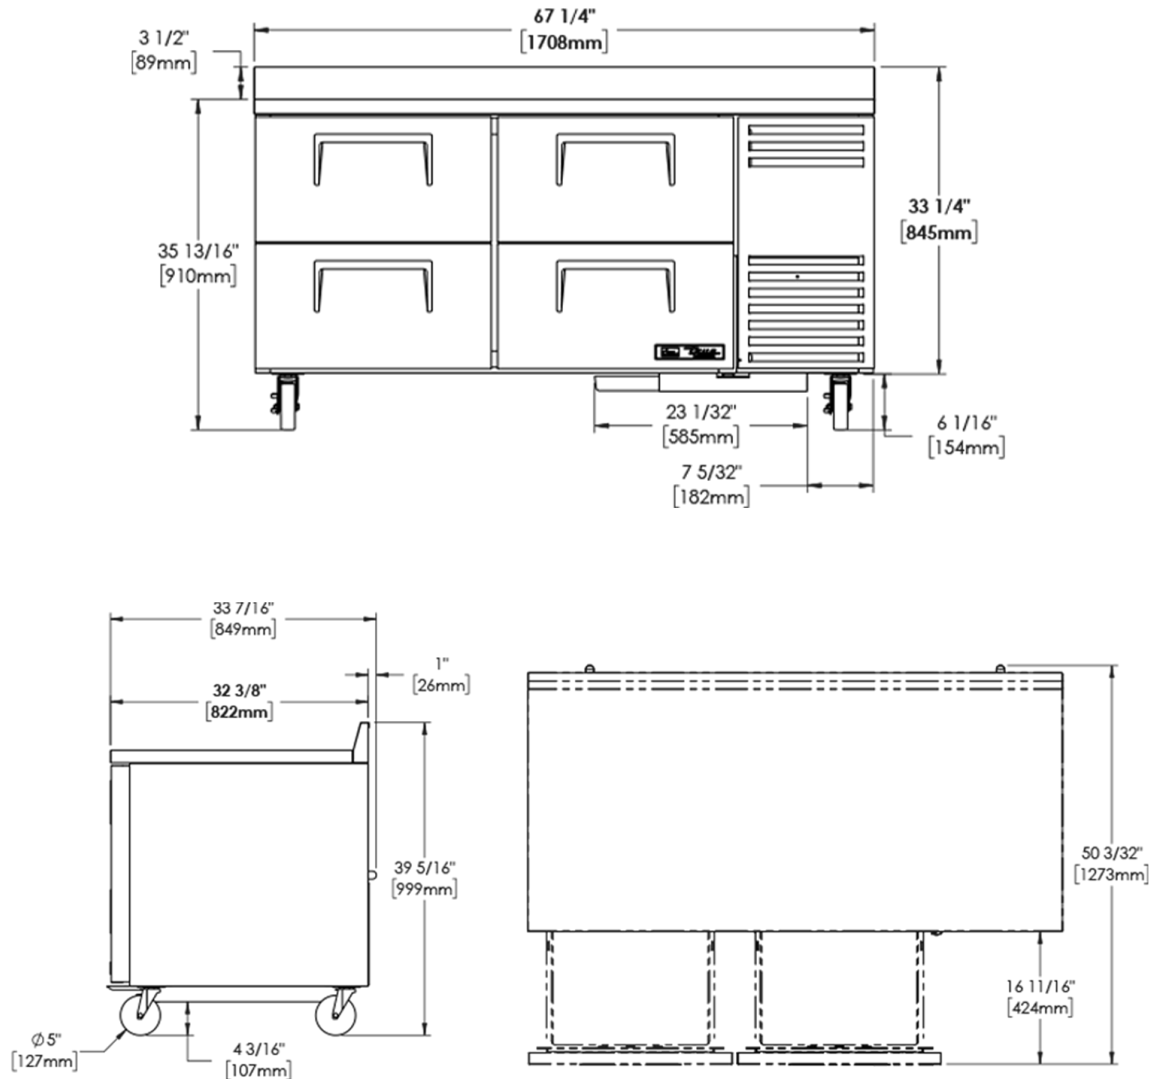

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland 0800 783 2049
EMEA +41 61 563 07 05
Australia +61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

